

Toastmaster

Foodservice Equipment

Job _____ Item# _____

Mini Conveyor Toaster Model TC17A



Controls

Rotary 3-position dial selects On/Off/Standby positions. A conveyor speed dial controls the belt speed. Heat dials control the upper and lower heating elements.

Capacity

Toasts approximately 300+ slices per hour of medium toast at 120V; 600+ slices at 208V or 240V per hour. Preheat time is 15 minutes.

Approximate Weight

41lbs. installed, 47lbs. shipping. May be shipped via UPS.

Warranty

Warranty includes two year parts and labor, on-site service. (U.S.A. only).

Ordering Information

Specify domestic or international use.

- TC17A - 120V, 1-Phase, 50/60 Hz.
- TC17A - 208V, 1-Phase, 50/60 Hz.
- TC17A - 240V, 1-Phase, 50/60 Hz.

Application

Mini commercial conveyor toasters designed to uniformly toast breads, buns, bagels, and muffins in large quantities, using continuous feed methods.

General Information

Feed tray connects to front of unit without tools. Tray is angled to feed continuously. Overall dimensions are 14 $\frac{5}{8}$ "W x 23"D (including feed tray and rear cord clearance) x 14 $\frac{5}{8}$ "H (including 4 $\frac{1}{4}$ " NSF listed, non-slip legs). The toasting chamber for the TC17 is 10 $\frac{1}{2}$ " W x 1 $\frac{1}{2}$ " H. Unit is shipped as a front return model, but can easily be converted to rear exit in the field.

Safety

Unique air flow design keeps case, top, and sides cool. The unit is equipped with an auto cool down feature which allows the fan to cool the outer skin when the unit is turned off.

Construction

Steel construction with a stainless steel finish is used for durability. A full-length crumb tray slides out for easy clean-up.


Electrical

Available in 120V, 208V or 240V, A/C, 1-phase only. Total rated input is 1.7 kW at 120V; 2.6 kW at 208V and 240V.

120V, 208V and 240V units are shipped with a factory installed 44" cord with a 20 amp plug. .


Heating

When control is set to "on", top and bottom tubular elements will turn on to toast both sides of bread. Lightness and darkness of the product is achieved by adjusting the top and bottom heat controls. Standby position allows for energy savings during non-peak periods.



NEMA
5-20P

120V
units only



NEMA
6-20P

208/240V
units only




A MIDDLEBY COMPANY

1400 Toastmaster Drive
Elgin, Illinois 60120 USA
1-800-323-2210 • Fax: 1-800-635-4725
www.middleby.com

Mini Conveyor Toaster

Model TC17A

NOTE: All Figures In Parentheses Are In Millimeters

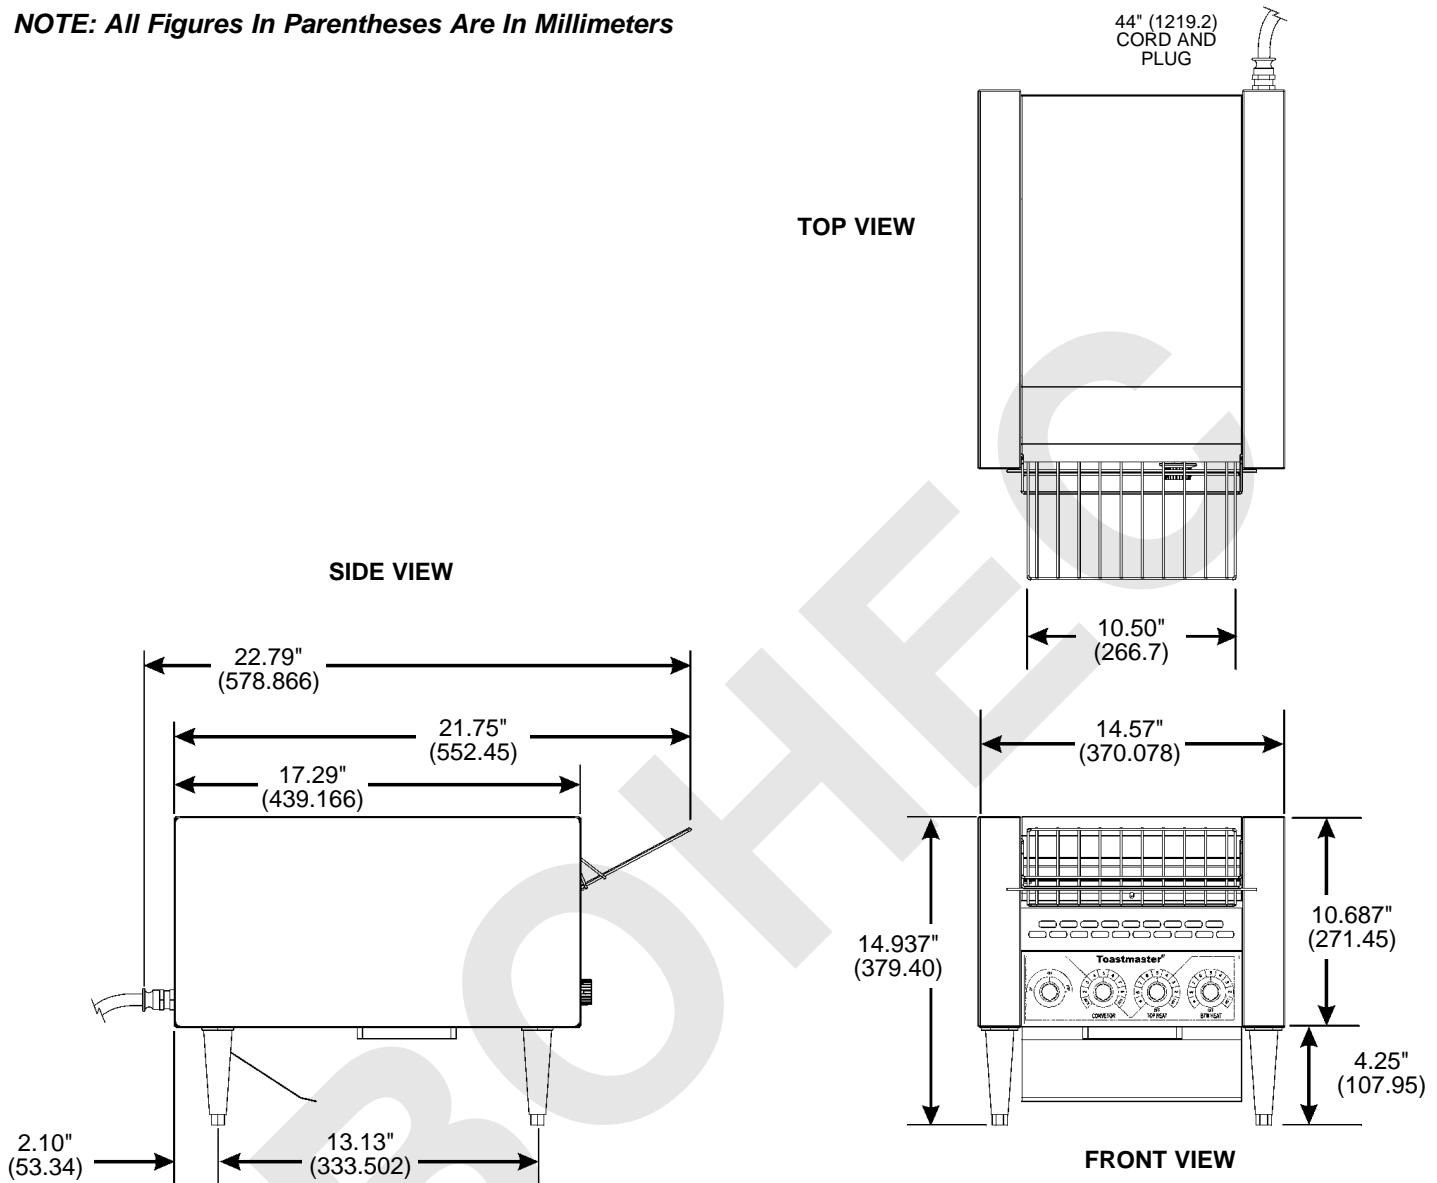

GENERAL INFORMATION

Model	Width	Height	Depth	Net Weight	Ship Weight
TC17A	14.57 (370)	14.937 (379.4)	17.29" (439.2)	41 lbs. 18.6 kg	47 lbs 21.3 kg

ELECTRICAL INFORMATION

Model#	Voltage	Phase	Hz	kW	Amps	Plug Type
TC17A	120	1	50/60	1.97	16.4	NEMA 5-20P (USA) NEMA 5-20P (Canada)
TC17A	208	1	50/60	2.62	12.6	NEMA 6-20P (USA) NEMA 6-20P (Canada)
TC17A	240	1	50/60	2.62	11.0	NEMA 6-20P (USA) NEMA 6-20P (Canada)

INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.

Toastmaster, in line with its policy to continually improve its products, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.

Toastmaster®

THE MIDDLEBY CORPORATION

1400 Toastmaster Drive, Elgin, IL 60120-9272 USA • 1-800-323-2210 • Fax: 1-800-635-4725

www.middleby.com